APPOLD – aluminium frame with timber insert AGS system, TUS series, unrebated, flush, inward opening

Single-leaf aluminium frame with timber insert without fanlight or overpanel

Frames according to DIN 68706-2

Type: TUT series aluminium frame with timber insert. Mitre-joined frame, complete with spreader bar.

Mounting brackets and mesh supplied separately. Wooden block frame unrebated on three sides.

Material: Main frame - aluminium, non-coated; timber insert - solid timber, optionally veneered.

Sealing: on three sides, white/beige/black, supplied separately.

Rebate: for unrebated door leaves, 56 mm thick.

Hinge base: two built-in Simons TECTUS TE 340 3D, color Alu F1.

Lock: magnetic mortise lock, 55 mm backset, stainless steel face plate, fitted for profile cylinder,

bathroom or warded locks.


Strike plate: fitted stainless steel plate for magnetic locks. Surface: veneer surfaces are UV-clear finished.

Untreated Hardboard and Priming Film surfaces not coated.

Size Calculation: wall opening minus 65 mm on all sides = clear opening of the frame

Price Includes: complete frame with timber insert, hinges, lock and strike plate. For door leaf options and additional

fittings, please see separate price list.

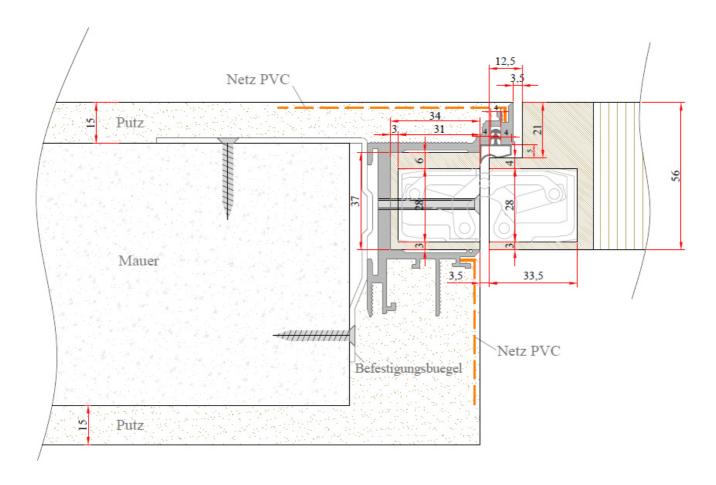

For other options, see Additional services